


KALIO SQUARE R

308-30039600

KALIO SQUARE R RECESSED SPOTLIGHT made of aluminium, black, similar to RAL 9005, beam 38°, light output direct, tilting 45°, without converter, max. 250mA, IP20

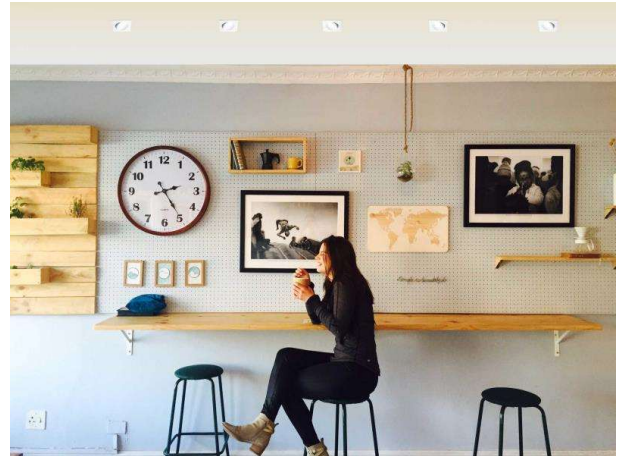


DRAWING




45°

1 - 20 mm

Ø 80 mm, ET 83 mm

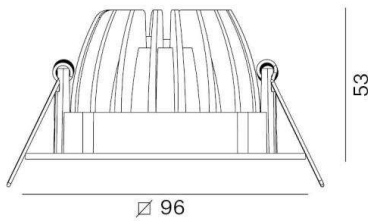

LIGHT DISTRIBUTION CURVE

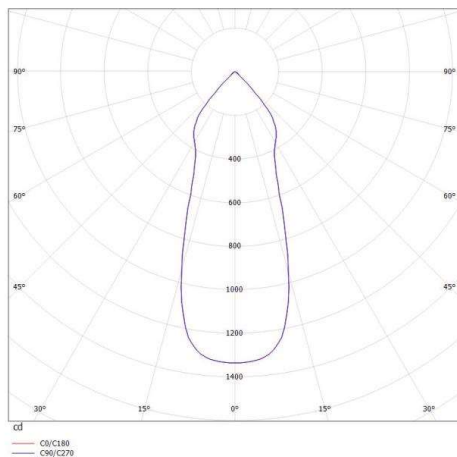

TECHNICAL DETAILS

| | |
|------------------------|-------------------|
| Bulb type | LED 8W |
| Luminous flux [lm] | 900 |
| Current sec. [mA] | 250 |
| Colour temp. [K] | 3000K |
| CRI | >90 |
| Light output | direct |
| Beam angle [°] | 38° |
| Voltage [V] | 36 VDC |
| Material | aluminium |
| Length [mm] | 96 |
| Width [mm] | 96 |
| Height [mm] | 53 |
| Ceiling cutout [mm] | 80 |
| Ceiling thickness [mm] | 1-20 |
| Recess depth [mm] | 83 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Net weight [kg] | 0,17 |
| Color lamp | black |
| RAL | 9005 |
| EAN-Number | 9010506140026 |
| Lifetime [h] | 25 000 |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.