


UTO

472-10009600

UTO PD SUSPENSION made of aluminium, black, similar to RAL 9005, light output direct, with converter, dimmable not dimmable, adapter/ceiling base black, pendant length 2000mm, IP20



DRAWING

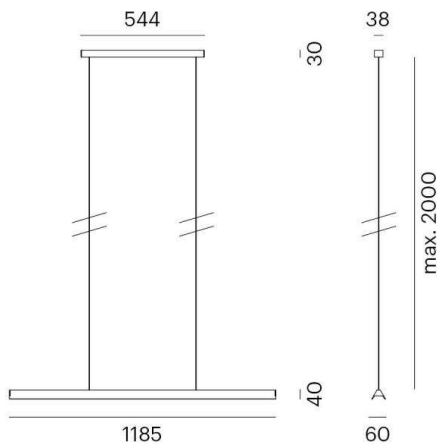


TECHNICAL DETAILS

System perform. [W]	32
Bulb type	LED
Luminous flux [lm]	2550
Colour temp. [K]	3000K
CRI	>90
Converter	with converter
Dimming	nicht dimmbar
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Length [mm]	1200
Width [mm]	60
Height [mm]	40
Pendant length [mm]	2000
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	3,90

LIGHT DISTRIBUTION CURVE

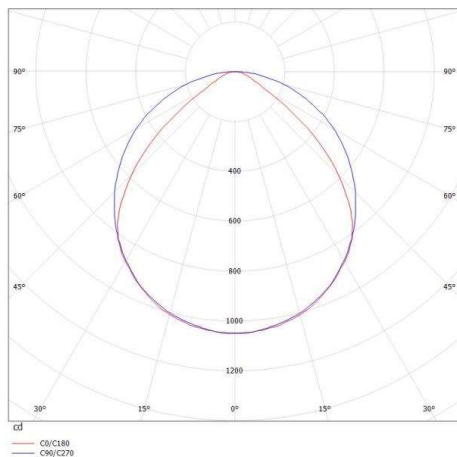

Color lamp	black
RAL	9005
Color adapter/ceiling base	black
EAN-Number	9010506127683
Lifetime [h]	25 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.