


TURN 4

472-20059500

TURN 4 SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, beam 40°, light output direct, tilting 350°, dimmable not dimmable, IP20




DRAWING

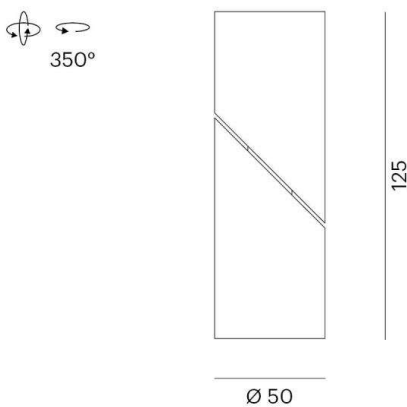

TECHNICAL DETAILS

System perform. [W]	4
Bulb type	AC LED
Luminous flux [lm]	240
Colour temp. [K]	3000K
CRI	>90
Dimming	nicht dimmbar
Light output	direct
Beam angle [°]	40°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	125
Diameter [mm]	50
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,33
Color lamp	white
RAL	9003
EAN-Number	9010506127324
Lifetime [h]	25 000

LIGHT DISTRIBUTION CURVE

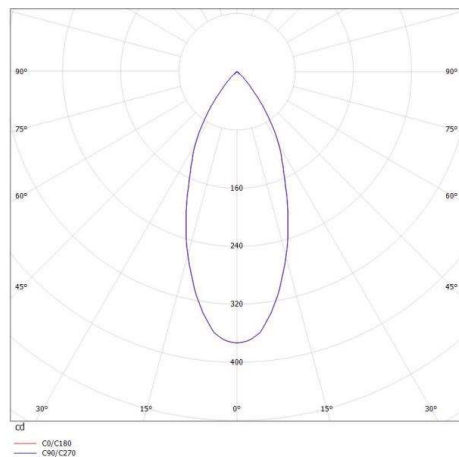

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.