


**TURN 4**

**472-20059600**

TURN 4 SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, beam 40°, light output direct, tilting 350°, dimmable not dimmable, IP20




**DRAWING**

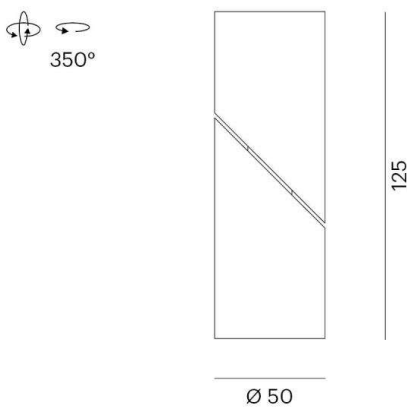

**TECHNICAL DETAILS**

System perform. [W]	4
Bulb type	AC LED
Luminous flux [lm]	240
Colour temp. [K]	3000K
CRI	>90
Dimming	nicht dimmbar
Light output	direct
Beam angle [°]	40°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	125
Diameter [mm]	50
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,33
Color lamp	black
RAL	9005
EAN-Number	9010506149319
Lifetime [h]	25 000

**LIGHT DISTRIBUTION CURVE**

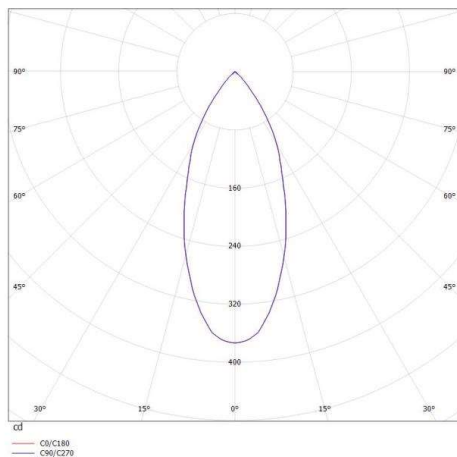

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.