


YURA SD

472-20063600

YURA SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, light output direct, dimmable not dimmable, IP20




DRAWING

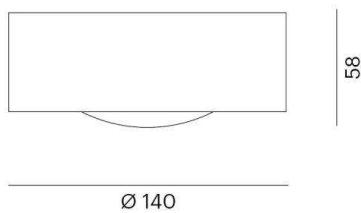

TECHNICAL DETAILS

System perform. [W]	20
Bulb type	AC LED
Luminous flux [lm]	990
Colour temp. [K]	2700K
CRI	>90
Dimming	nicht dimmbar
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	58
Diameter [mm]	140
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,50
Color lamp	black
RAL	9005
EAN-Number	9010506265378
Lifetime [h]	25 000

LIGHT DISTRIBUTION CURVE

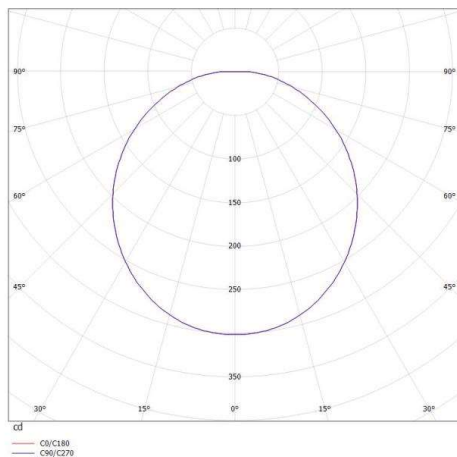

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.