


APOLLO M

642-02202002957a

APOLLO M PD SUSPENSION made of steel sheet, white matt, similar to RAL 9016, decor beige, opal diffuser made of polyethylene satined, light output direct / indirect, with converter, max. 350mA, dimmable 1-10V, cable white, fabric, pendant length 3000mm, IP20




DRAWING

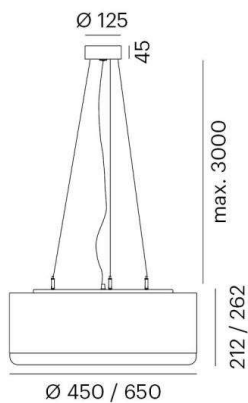

TECHNICAL DETAILS

System perform. [W]	22
Bulb type	LED
Luminous flux [lm]	1400
Current sec. [mA]	350
Colour temp. [K]	3000K
CRI	>90
Optics	opal diffuser made of rotomoulded polyethylene
Designer	Michael Raasch
Converter	with converter
Dimming	1-10V
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	steel sheet

LIGHT DISTRIBUTION CURVE

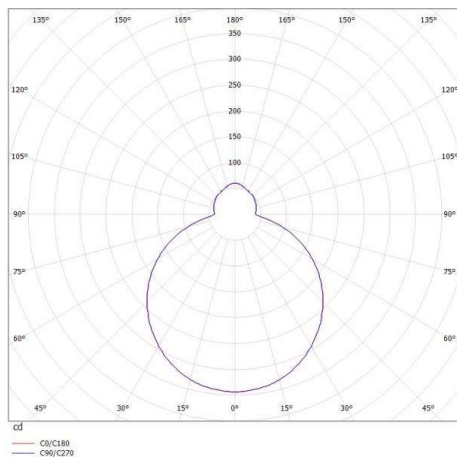

Height [mm]	212
Pendant length [mm]	3000
Diameter [mm]	450
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	10,73

Color lamp	white matt
RAL	9016
Glass color	satined
Colour decor	beige
Electric wire	white, fabric
EAN-Number	9010506034448
Lifetime [h]	50 000 L80 B10
No. of luminaires B16A	50



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.