


ALGAE

696-00101032373d

ALGAE L PD SUSPENSION made of aluminium, chalk, similar to RAL 7030, anti-glare LFO lens due to microfaceted structure beam 55°, light output direct, with converter, max. 350mA, dimmable DALI, cable black, soft-touch, adapter/ceiling base chalk, pendant length 1500mm, IP20



DRAWING

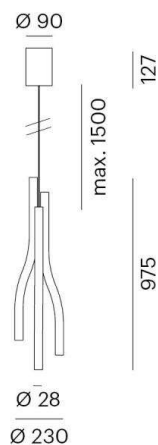


TECHNICAL DETAILS

System perform. [W]	15
Bulb type	LED
Luminous flux [lm]	710
Current sec. [mA]	350
Colour temp. [K]	2700K
CRI	>90
Optics	LFO lens
Designer	Rainer Mutsch
Dimming	DALI
Light output	direct
Beam angle [°]	55°
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Length [mm]	140
Height [mm]	975
Pendant length [mm]	1500
Diameter [mm]	230
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	2,48

LIGHT DISTRIBUTION CURVE

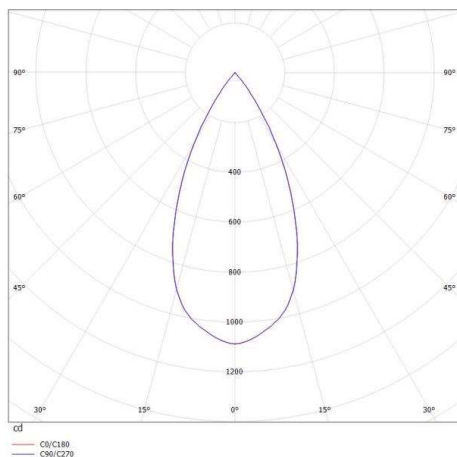

Color lamp	chalk
RAL	7030
Color adapter/ceiling base	chalk
base	black, soft-touch
Electric wire	9010506000429
EAN-Number	L80 B10 50 000
Lifetime [h]	30
No. of luminaires B16A	



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.