


ALGAE

696-00101032966a


ALGAE L PD SUSPENSION made of aluminium, black, similar to RAL 9005, anti-glare LFO lens due to microfacetted structure beam 55°, light output direct, with converter, max. 350mA, dimmable 1-10V, cable black, soft-touch, adapter/ceiling base black, pendant length 1500mm, IP20



DRAWING

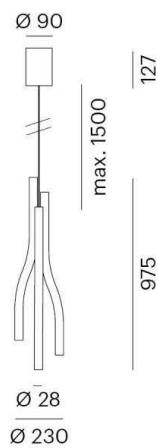

LIGHT DISTRIBUTION CURVE

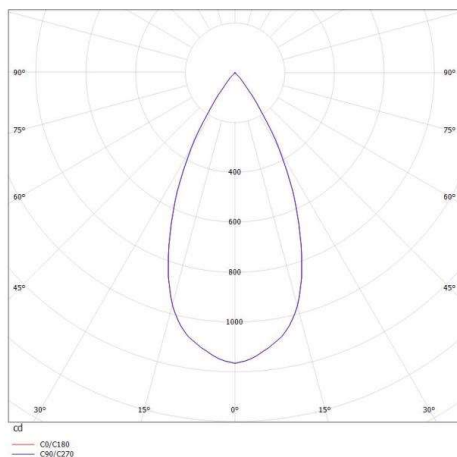

TECHNICAL DETAILS

|                     |                  |
|---------------------|------------------|
| System perform. [W] | 15               |
| Bulb type           | LED              |
| Luminous flux [lm]  | 760              |
| Current sec. [mA]   | 350              |
| Colour temp. [K]    | 3000K            |
| CRI                 | >90              |
| Optics              | LFO lens         |
| Designer            | Rainer Mutsch    |
| Dimming             | 1-10V            |
| Light output        | direct           |
| Beam angle [°]      | 55°              |
| Voltage [V]         | 220-240V 50/60Hz |
| Material            | aluminium        |

|                     |                  |
|---------------------|------------------|
| Length [mm]         | 140              |
| Height [mm]         | 975              |
| Pendant length [mm] | 1500             |
| Diameter [mm]       | 230              |
| IP protection class | IP20             |
| Voltage class       | protection cl. I |
| Net weight [kg]     | 2,18             |

|                            |                   |
|----------------------------|-------------------|
| Color lamp                 | black             |
| RAL                        | 9005              |
| Color adapter/ceiling base | black             |
| Electric wire              | black, soft-touch |
| EAN-Number                 | 9010506000481     |
| Lifetime [h]               | L80 B10 50 000    |
| No. of luminaires B16A     | 50                |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.