



ARKADE

709-1001360d

ARKADE SINGLE PD SUSPENSION made of aluminium, black, similar to RAL 9005, high-efficiently vacuum deposited synthetic reflector beam 38°, light output direct, with converter, max. 700mA, dimmable DALI, cable black, adapter/ceiling base black, pendant length 2300mm, IP20

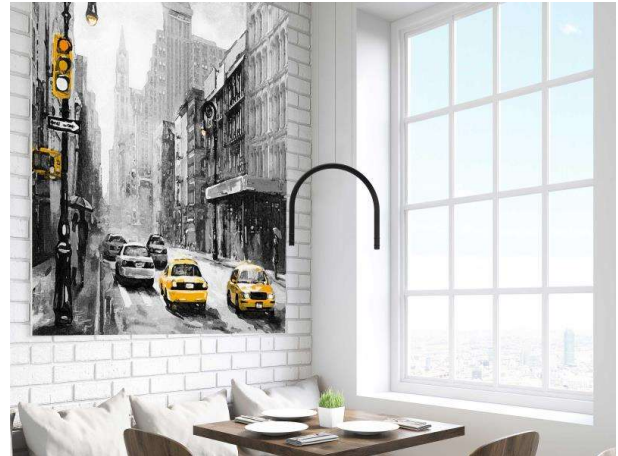


DRAWING

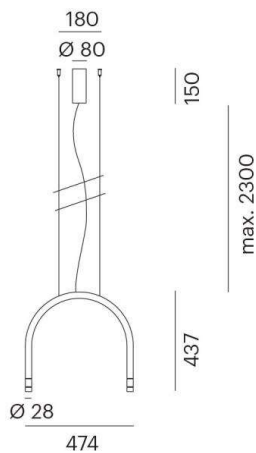

TECHNICAL DETAILS

System perform. [W]	9
Bulb type	LED
Luminous flux [lm]	800
Current sec. [mA]	700
Colour temp. [K]	2700K
CRI	>90
Optics	vacuum deposited synthetic reflector Rainer Mutsch with converter
Designer	
Converter	DALI
Dimming	direct
Light output	38°
Beam angle [°]	220-240V 50/60Hz
Voltage [V]	aluminium
Material	
	437
Height [mm]	2300
Pendant length [mm]	28
Diameter [mm]	IP20
IP protection class	protection cl. I
Voltage class	1,04
Net weight [kg]	
	black
Color lamp	9005
RAL	black
Color adapter/ceiling base	black
Electric wire	9010506276848
EAN-Number	50 000 L80 B10
Lifetime [h]	50
No. of luminaires B16A	

LIGHT DISTRIBUTION CURVE

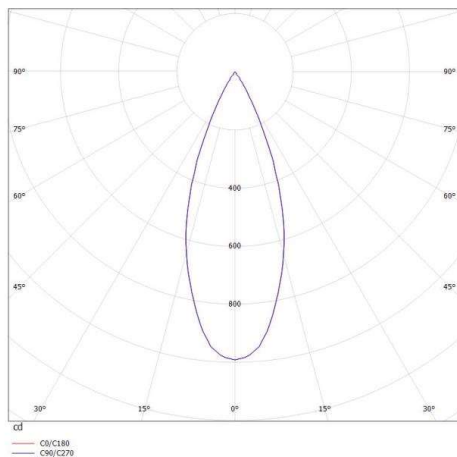

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.