


ARKADE

709-1001960d


ARKADE SINGLE PD SUSPENSION made of aluminium, black, similar to RAL 9005,high-efficiently vacuum deposited synthetic reflector beam 38°, light output direct, with converter, max. 700mA, dimmable DALI, cable black, adapter/ceiling base black, pendant length 2300mm, IP20



DRAWING

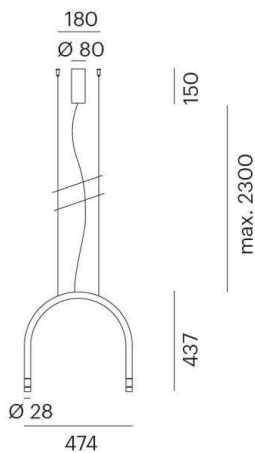

LIGHT DISTRIBUTION CURVE

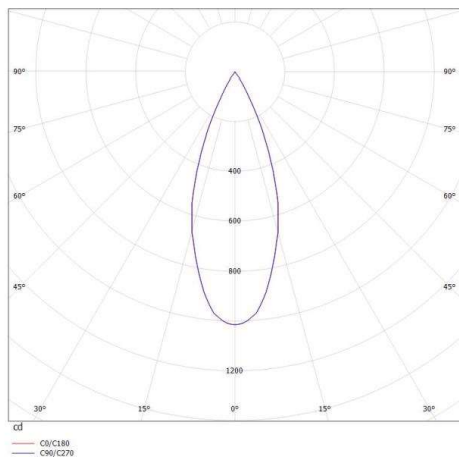

TECHNICAL DETAILS

System perform. [W]	9
Bulb type	LED
Luminous flux [lm]	820
Current sec. [mA]	700
Colour temp. [K]	3000K
CRI	>90
Optics	vacuum deposited synthetic reflector Rainer Mutsch with converter
Designer	DALI
Converter	direct
Dimming	38°
Light output	220-240V 50/60Hz
Beam angle [°]	aluminium
Voltage [V]	437
Material	2300
Height [mm]	28
Pendant length [mm]	IP20
Diameter [mm]	protection cl. I
IP protection class	1,04
Voltage class	black
Net weight [kg]	9005
Color lamp	black
RAL	black
Color adapter/ceiling base	black
Electric wire	9010506140033
EAN-Number	50 000 L80 B10
Lifetime [h]	50
No. of luminaires B16A	



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.