


**DECAFELT L**

**730-2002959d**


DECAFELT L SD SURFACE MOUNTED CEILING LUMINAIRE made of acoustic element, anthrazite, opal diffuser made of polyethylene light output direct / indirect, with converter, max. 1050mA, dimmable DALI, IP20



**DRAWING**

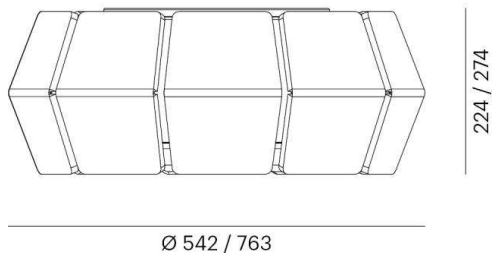

**LIGHT DISTRIBUTION CURVE**

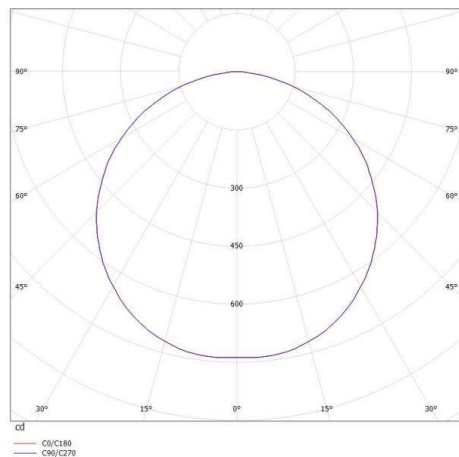

**TECHNICAL DETAILS**

System perform. [W]	41
Bulb type	LED
Luminous flux [lm]	2200
Current sec. [mA]	1050
Colour temp. [K]	3000K
CRI	>90
Optics	opal diffuser made of rotomoulded polyethylene
Designer	INHOUSE
Converter	with converter
Dimming	DALI
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	acoustic element
Height [mm]	274
Diameter [mm]	763
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	14,42
Color lamp	anthrazite
EAN-Number	9010506161250
Lifetime [h]	50 000 L80 B10
No. of luminaires B16A	30



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.